



Œ

Materials

Support consisting of Ø 33 mm [1 in] mirror polished AISI 304 stainless steel curved tube (optionally AISI 316) with end plates for fixing it to the pavement. Connection flange in black polyamide and stainless-steel AISI 304 satin polished finish.

Installation and maintenance

The supports are fixed using expansive blocks. The element is supplied disassembled and packed in two parts: support and union. Instructions, screws and bolts are included. No functional maintenance is required.

For further information log onto urbidermis.com

Standards


UNE 41510, UNE-EN 10088, UNE-EN ISO 9445, UNE ISO 21542.



*The colours shown are merely indicative and may differ from reality. (Other colours available to order) **Consult finishes for marine environments.

Weight kg [lb] (unpacked) 16 [0.63]

Montana Bicycle rack Héctor Roqueta, Ferrán Sesplugues. 2005

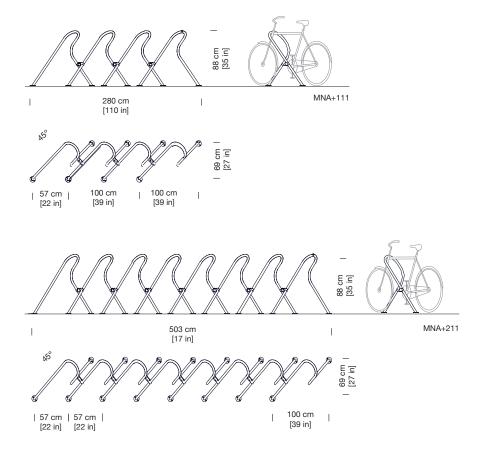

Headquarters Parc de Belloch Ctra. C-251, Km 5,6 E-08430 La Roca (Barcelona, Spain) +34 938 619 100

Warehouse Carrer del Fou. Polígono Industrial Sud E-08440 Cardedeu (Barcelona, Spain) +34 938 619 182



The technical information provided by Urbidermis may be modified at any time without prior notice. We protect intellectual property. info@urbidermis.com / +34 938 619 100 / urbidermis.com